




An enterprise of United McGill Corporation —
Founded in 1951

UNI-STACK™

U.L. LISTED CHIMNEY, BREECHING, and GREASE DUCT SYSTEMS

a McGill AirFlow™ product

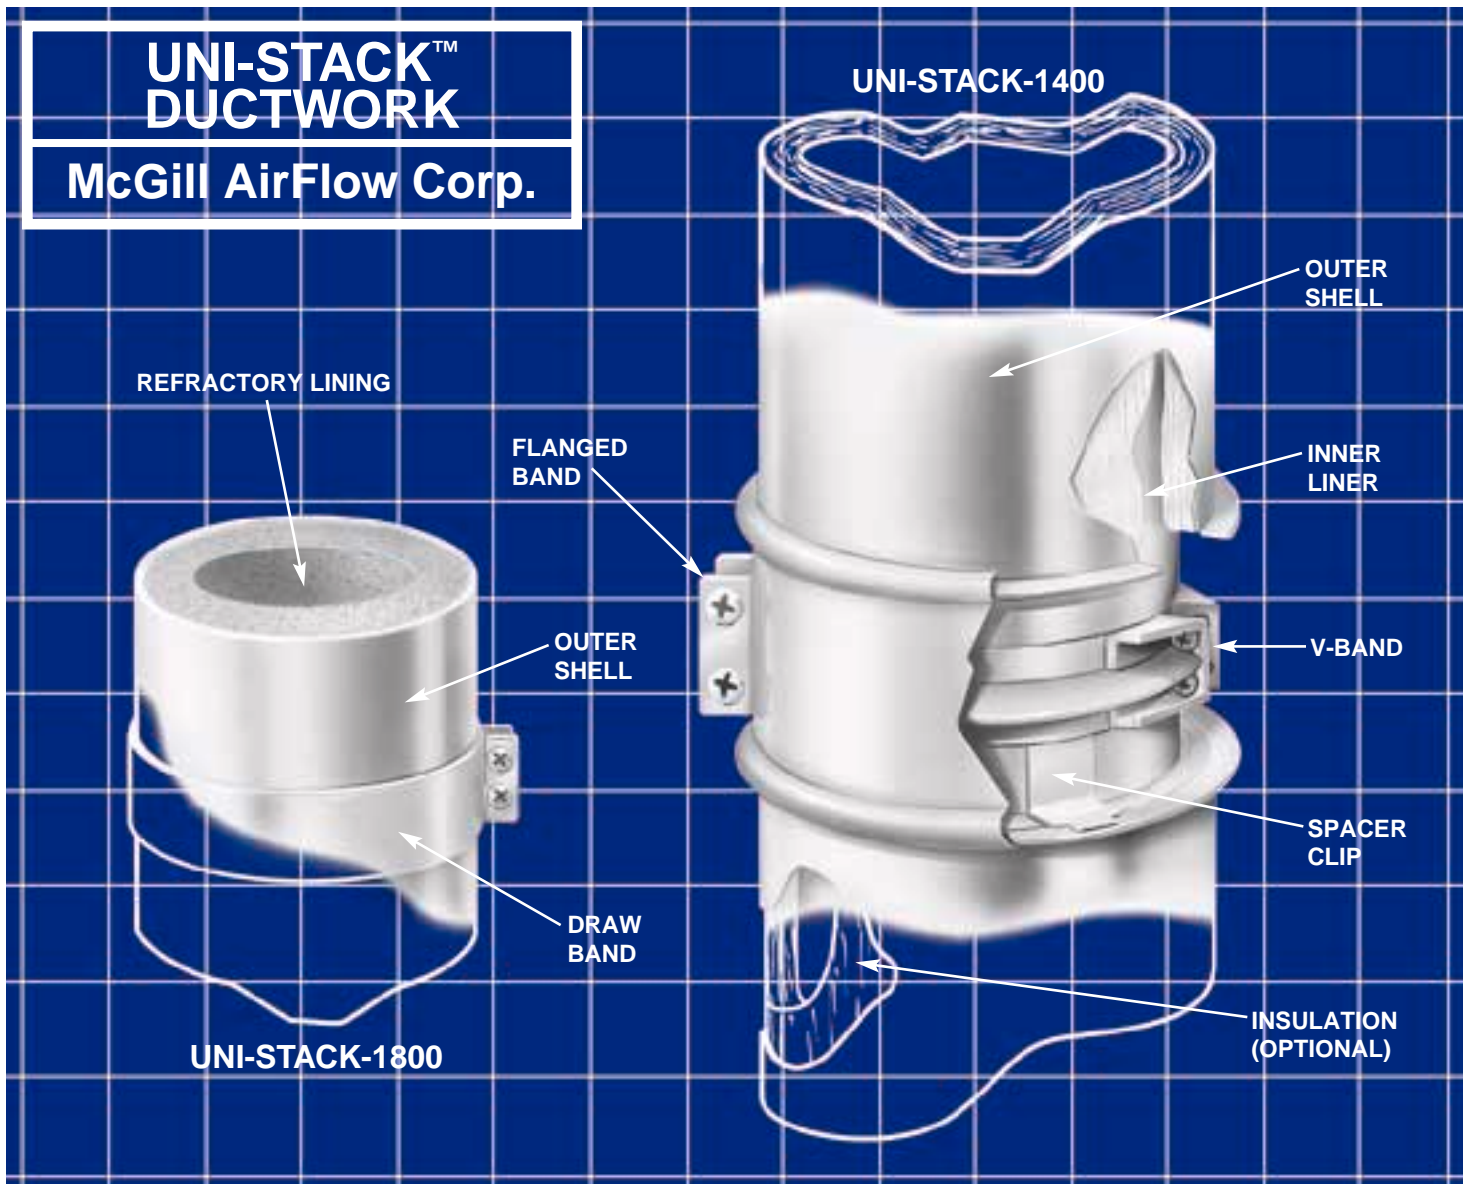

UNI-STACK™ ductwork is designed for use as prefabricated chimney, breeching, and exhaust systems. We can provide all the components needed to construct a complete system, including round duct, elbows, tees, supports, terminations, and connecting devices. Our standard designs meet the requirements of a wide range of boilers, incinerators, heating appliances, and industrial processes. Because corrosion can be a major problem in stacks, each of our standard products is designed to resist specific corrosive conditions. Components and materials should be chosen based on their ability to stand up to the corrosive properties of the flue gas being vented.

Our engineers can size your system and recommend one of our standard products or custom design a chimney system for you. By providing corrosion and thermal analyses for metals, refractories, and other chimney materials, we can determine how they will be affected by specific flue gas components. We can also make mid-flue and surface temperature calculations, seismic calculations, and structural analyses to help meet the requirements of your application.

UNI-STACK-S Duct

UNI-STACK-S single-wall, stainless steel ductwork is designed to resist atmospheric corrosion in exhaust systems that vent fume hoods and heating appliances and for boiler breeching systems. It can be used with fuels such as liquid propane gas, natural gas, #2, #4*, #5*, and #6* fuel oils, wood*, and coal* (*316 stainless steel should be specified when using these fuels for combustion). It is suitable for caustic air and fumes, vapors, and particle containment systems. UNI-STACK-S ductwork can handle flue gas with a maximum temperature of 1,400°F for continuous firing and a maximum temperature of 1,800°F for intermittent firing.

Construction

UNI-STACK-S single-wall duct is constructed with a welded longitudinal seam in standard lengths of 18, 30, and 42 inches. Standard diameters are 6 to 48 inches in 2-inch increments. For diameters of 6 to 36 inches, the standard material is 20-gauge, 304

stainless steel. For diameters of 38 to 48 inches, the standard material is 18-gauge, 304 stainless steel. Other diameters and materials are available. All components have flanged ends. Vee bands and sealant are provided to secure the flanged connections.

Clearance Requirements

Consult local codes to determine how much clearance is needed between UNI-STACK-S ductwork and combustible building materials such as wood and plasterboard.

UNI-STACK-1400 Series

UNI-STACK-1400 double-wall ductwork is designed for positive and negative pressure chimney and breeching systems that vent boilers, kilns, incinerators, grease ducts, and emergency generators. The double-wall design features a stainless steel inner liner and aluminized steel outer shell. It helps maintain a high flue gas temperature so that corrosive gases will not condense inside the stack. Insulation is available to lower



United McGill® is a registered trademark, and UNI-STACK™, McGill AirFlow™, and Duct Express™ are trademarks of United McGill Corporation.

the temperature of the duct's outer shell. This duct can be used with fuels such as liquid propane gas, natural gas, #2, #4*, #5*, and #6* fuel oils, wood*, and coal* (*316 stainless steel should be specified when using these fuels for combustion). It is suitable for caustic air and fumes, grease vapors, and particle containment systems. UNI-STACK-1400 ductwork can handle flue gas with a maximum temperature range of 1,000°F to 1,400°F for continuous firing and a maximum temperature range of 1,400°F to 1,800°F (2,000°F in grease duct applications) for intermittent firing.

Construction

UNI-STACK-1400 double-wall ductwork is available in five standard models:

Model 1400 has a 1-inch air space between the outer shell and liner.

Model 1401 has 1 inch of fiber insulation between the outer shell and liner.

Model 1402 has 2 inches of fiber insulation between the outer shell and liner.

Model 1403 has 3 inches of fiber insulation between the outer shell and liner.

Model 1404 has 4 inches of fiber insulation between the outer shell and liner.

UNI-STACK-1400 duct is constructed with a welded longitudinal seam in lengths of 18, 30, and 42 inches. Standard diameters are 6 to 48 inches in 2-inch increments. For diameters of 6 to 36 inches, the standard material is 20-gauge, 304 stainless steel for the liner and 24-gauge aluminized steel for the outer shell. For diameters of 38 to 48 inches, the standard material is 18-gauge, 304 stainless steel for the liner and 20-gauge aluminized steel for the outer shell. The duct is also available in other diameters and with 316 stainless steel liners or outer shells. Liners have flanged ends. Vee bands and sealant are provided to secure the flanged connections. Outer shells are joined by flanged bands for environmental protection. To maintain the concentric spacing between the inner

liner and outer shell, spacer clips are welded to the liner and hooked over the edges of the shell.

Clearance Requirements

For noncombustible materials, Model 1400 (1,000°F applications) requires a clearance of 2 inches when inside diameters are 18 inches or less and a clearance of 4 inches when inside diameters are greater than 18 inches. For Model 1400 (1,400°F applications), the clearance is the same as for combustible materials. For Models 1401, 2, 3, 4 (1,400°F applications), a clearance of 4 inches from noncombustible materials is required when the inside diameter is 18 inches or greater.

The following clearances must be maintained from combustible building materials.

Model 1400: 4 inches for 1,000°F applications, 6 inches for 1,400°F applications.

Models 1401, 2, 3, 4: 2 inches for 1,000°F applications, 4 inches for 1,400°F applications.

Models 1400, 1, 2, 3, 4 (grease duct applications):

Inside Diameter (inches)	Clearance (inches)
6-8	10
10	12
12	13
14	14
16	15
18	16
20-22	17
24-36	18

Application References and Listings: UL, ULC, NFPA

UNI-STACK-1800 Series

UNI-STACK-1800 refractory-lined, steel ductwork is designed to withstand high temperatures and resist corrosion from acid gases in chimney, breeching, and exhaust systems that vent boilers, furnaces, incinerators, fireplaces, appliances that burn wood or coal, kilns, kitchen appliances, diesel/gas engines, heat recovery

UNI-STACK-1400 Duct



systems, and process equipment. It can be used with all types of fuels and combustible materials. UNI-STACK-1800 ductwork can handle flue gas with a maximum temperature range of 960°F to 3,100°F for continuous firing and intermittent firing.

Construction

UNI-STACK-1800 ductwork is available in eight refractory-lined models:

Model 1800 has a refractory aggregate bonded with calcium aluminate cement.

Model 1800 Plus replaces 1 inch of 1800 refractory with insulating board for thermal control in heat recovery applications.

Model 1800 V has a refractory of high-density aggregate bonded with high-purity calcium aluminate cement.

Model 1800 AR-2 has a refractory of high-density aggregate cobonded with high-purity calcium aluminate cement and potassium silicate binders.

Model 1800 AR-H has a refractory that is a low-shrink mix of 60 percent alumina to provide high strength, high density, and high abrasion resistance.

Model 1800 AR-T has an amorphous, vitreous silica refractory to provide high density and high abrasion resistance.

Model 1800 BB has foamed, closed-cell borosilicate blocks secured to the outer shell with 1/8-inch urethane asphalt adhesive membrane.

Model 1800 EE uses 1 inch of the standard Model 1800 refractory for engine exhaust applications.

Model 1800 CUS can be supplied with custom refractory and membrane linings to meet your needs.

UNI-STACK-1800 duct is constructed with a welded (or riveted for 26 gauge) longitudinal seam in standard lengths of 36 inches for inside diameters of 4 through 8 inches and lengths of 48 inches (72 inches for heavy gauges) for inside diameters of 9 through 60 inches. Standard diameters are 4 to 60 inches inside diameter

(Model 1800 Plus is 4 to 60 inches and Model 1800 BB is 30 inches or greater). Standard outer shell materials are 26-gauge aluminized steel or 11-gauge galvanized steel. Stainless steel (304 and 316) jackets are available. Model 1800 is not available in 26 gauge for inside diameters greater than 36 inches. Components are joined with a leak-proof and acid-resistant sealant. An 8-inch-wide, 26-gauge aluminized steel draw band is placed over each sealed joint and bolted tightly to secure the joint. For heavy-gauge outer shells, an 11-gauge galvanized steel draw band is available. Joints can also be welded to increase strength.

Clearance Requirements

For noncombustible materials, a clearance of 2 inches is required for inside diameters of 4 to 18 inches and a clearance of 4 inches is required for inside diameters greater than 18 inches. Note: clearances in a noncombustible interior chase shall be as necessary to ease installation and/or allow access.

The following clearances must be maintained between Model 1800 and combustible building materials (a clearance of 6 inches is required for all diameters when used with low-heat appliances producing flue gas temperatures of 1,000°F or less).

Inside Diameter (inches)	Clearance (inches)
4-15	16
18-21	18
24	20
27	21
30-36	22
39-42	25
45	26
48	27
51	28
54	29
57	30
60	31

Application References and Listings: UL (Model 1800 only), BOCA, NFPA, SBC, UBC, NBC, ICBO



UNI-STACK-1800 Duct

UNI-STACK-ENG Chimneys

In addition to supplying our standard products, we can engineer a chimney for your application. Our engineering services include sizing, structural analysis, thermal analysis, and corrosion analysis. We can recommend a stack lining for specific thermal and corrosion conditions. Typical linings are cast refractory, gunned refractory, foamed borosilicate block, fiberglass-reinforced polymer, and organic coatings.

We can also design a single stack that contains multiple chimney systems

constructed of steel or other materials. For existing chimneys, we can perform field inspections and recommend repairs. Large projects can be field fabricated and installed at the jobsite.

Applications

The chart below lists the most common applications for each of our standard products. In addition, we can provide effective, economical solutions for unique venting and exhaust applications.



The products depicted in this brochure were current at the time of publication. As a quality-conscious manufacturer, McGill AirFlow Corporation continually seeks ways to improve its products to better serve its customers. Therefore, all designs, specifications, and product features are subject to change without notice.

Applications

Applications	Products												
	UNI-STACK-S	UNI-STACK-1400, 1, 2, 3, 4 - 304	UNI-STACK-1400, 1, 2, 3, 4 - 316	UNI-STACK-1800	UNI-STACK-1800 Plus	UNI-STACK-1800 w/membrane	UNI-STACK-1800 V	UNI-STACK-1800 AR-2	UNI-STACK-1800 AR-H	UNI-STACK-1800 AR-T	UNI-STACK-1800 BB	UNI-STACK-1800 EE	UNI-STACK-ENG
Boiler-HWH*-Furnace, Gas, Negative Pressure, Noncondensing	●	●		●	●	●							●
Boiler-HWH*-Furnace, Gas, Positive Pressure, Noncondensing	●	●		●	●	●							●
Condensing Boiler-HWH*-Furnace-Unit Heater, Gas, Negative Pressure						●				●			●
Condensing Boiler-HWH*-Furnace-Unit Heater, Gas, Positive Pressure						●				●			●
Boiler-HWH*-Furnace, #1 & #2 Oil		●	●	●									●
Boiler-HWH*-Furnace, #3 & #6 Oil			●	●									●
Boiler-HWH*-Furnace, Coal			●	●									●
Boiler-HWH*-Furnace, Wood			●	●									●
Engine Exhaust, Diesel		●		●	●							●	●
Engine Exhaust, Gas Turbine		●		●	●							●	●
Incinerator, Wood & Paper Products < 1,400°F				●	●								●
Incinerator, Wood & Paper Products > 1,400°F				●	●					●			●
Incinerator, General Hospital Waste							●	●		●			●
Incinerator, Pathological							●	●	●	●			●
Incinerator, Special Conditions													●
Hood, Kitchen Exhaust		●	●	●	●								●
Hood, Laboratory Exhaust	●												●
Hood, Fume	●												●
Scrubber, Inlet Side							●						●
Scrubber, Outlet Side											●		●
Heat Recovery, Inlet Side							●						●
Heat Recovery, Outlet Side										●	●		●

* HWH (Hot Water Heater)

Sales Engineering Offices, Manufacturing Plants, and Duct Express™ Warehouses

Alabama

□ 241 Lyon Lane
Birmingham, AL 35211
 205/944-0034
 Fax: 205/944-0091
birmingham@mcgillairflow.com

Arizona

□ 1236 West Southern Avenue
 No. 105
Tempe, AZ 85282
 480/966-2638
 Fax: 480/966-4850
phoenix@mcgillairflow.com

California

□ 1747 East Charter Way
Stockton, CA 95205
 209/466-2351
 Fax: 209/941-2739
californiaplant@mcgillairflow.com

□ 3914 Murphy Canyon Road
 No. A167
San Diego, CA 92123
 858/571-0989
 Fax: 858/571-3659
sandiego@mcgillairflow.com

Colorado

□ 4920B Fox Street
Denver, CO 80216
 303/297-8307
 Fax: 303/297-8309
denver@mcgillairflow.com

Connecticut

□ 15E International Drive
East Granby, CT 06026
 860/653-8001
 Fax: 860/653-6995
hartford@mcgillairflow.com

Florida

□ 4408 SW 36th Street
Orlando, FL 32811
 407/841-7953
 Fax: 407/423-8975
orlandoplant@mcgillairflow.com

□ 3406 SW 26 Terrace
 No. C-10
Ft. Lauderdale, FL 33312
 954/321-5898
 Fax: 954/321-5788
ft.lauderdale@mcgillairflow.com

Colonial Plaza Office Complex
 6251 Phillips Highway
 No. 3
Jacksonville, FL 32216
 904/733-3868
 Fax: 904/733-3978
jacksonville@mcgillairflow.com

□ 6203 Johns Road
 No. 12
Tampa, FL 33634
 813/888-8803
 Fax: 813/888-8831
tampabay@mcgillairflow.com

Georgia

□ 1750 Enterprise Way
 No. 108
Marietta, GA 30067
 770/541-1843
 Fax: 770/541-0737
atlanta@mcgillairflow.com

Illinois

□ 125 Windsor Drive
 No. 103
Oak Brook, IL 60523
 630/572-1293
 Fax: 630/572-1310
chicago@mcgillairflow.com

□ 2001 West Willow Knolls Road
 No. 201
Peoria, IL 61614
 309/692-2085
 Fax: 309/691-1508
peoria@mcgillairflow.com

Indiana

□ 3880 Pendleton Way
 No. 700
Indianapolis, IN 46226
 317/541-1530
 Fax: 317/541-1536
indianapolis@mcgillairflow.com

Iowa

□ 900 Pinder Avenue
Grinnell, IA 50112
 641/236-6728
 Fax: 641/236-7352
iowaplant@mcgillairflow.com

Kentucky

□ 3300 Ruckriegel Parkway
 No. 108
Louisville, KY 40299
 502/266-8939
 Fax: 502/266-9957
louisville@mcgillairflow.com

Maryland

□ 9210 Hampton Overlook
 No. B-6
Capitol Heights, MD 20743
 301/324-2322
 Fax: 301/324-0048
baltimore-washington@mcgillairflow.com

Massachusetts

□ 2J Gill Street
Woburn, MA 01801
 781/939-0797
 Fax: 781/939-0931
boston@mcgillairflow.com

Michigan

□ 32713 Schoolcraft Road
 No. 107
Livonia, MI 48150
 734/266-4169
 Fax: 734/266-4182
detroit@mcgillairflow.com

New Jersey

□ 40 Baldwin Road
 No. 4
Parsippany, NJ 07054
 973/334-9440
 Fax: 973/334-9518
newyork@mcgillairflow.com

New York

□ 2100 Brighton Henrietta
 Town Line Road
Rochester, NY 14623
 716/475-1470
 Fax: 716/475-1477
rochester@mcgillairflow.com

North Carolina

□ 2748-G Interstate Street
Charlotte, NC 28208
 704/393-1056
 Fax: 704/393-0873
charlotte@mcgillairflow.com

□ 2201 Brentwood Road
 No. 105
Raleigh, NC 27604
 919/790-9888
 Fax: 919/790-7161
raleigh@mcgillairflow.com

Ohio

□ 2400 Fairwood Avenue
Columbus, OH 43207
 614/443-5520
 Fax: 614/444-0234
ohioplant@mcgillairflow.com

□ 485 Ken-Mar Industrial Pkwy.
Broadview Heights, OH 44147
 440/546-4454
 Fax: 440/546-4933
cleveland@mcgillairflow.com

□ 2954 East Crescentville Road
West Chester, OH 45069
 513/771-5111
 Fax: 513/771-8887
cincinnati@mcgillairflow.com

Pennsylvania

□ 307 East Church Road
 No. 7
King of Prussia, PA 19406
 610/292-8087
 Fax: 610/292-8204
philadelphia@mcgillairflow.com

□ 2593 Wexford-Bayne Road
 No. 101
Sewickley, PA 15143
 724/934-0466
 Fax: 724/934-0170
pittsburgh@mcgillairflow.com

South Carolina

□ 300 Dale Drive
Fountain Inn, SC 29644
 864/862-4463
 Fax: 864/862-5408
s.carolinaplant@mcgillairflow.com

Tennessee

□ 4169 Senator Street
Memphis, TN 38118
 901/797-9014
 Fax: 901/797-8934
memphis@mcgillairflow.com

□ 614 Airpark Center Drive
Nashville, TN 37217
 615/366-3191
 Fax: 615/366-3715
nashville@mcgillairflow.com

Texas

□ 206 Pecos Street
Hillsboro, TX 76645
 254/582-5392
 Fax: 254/582-2426
texasplant@mcgillairflow.com

□ 2550 114th Street
 No. 160
Grand Prairie, TX 75050
 972/606-8553
 Fax: 972/606-8711
dallas-ft.worth@mcgillairflow.com

□ 2523 Fairway Park Drive
 No. 520
Houston, TX 77092
 713/680-3771
 Fax: 713/680-8037
houston@mcgillairflow.com

□ 12961 Park Central
 No. 1420
San Antonio, TX 78216
 210/402-0122
 Fax: 210/402-0543
sanantonio@mcgillairflow.com

Vermont

□ 452 Harwood Hill Road
Bennington, VT 05201
 802/442-8536
 Fax: 802/442-9437
vermontplant@mcgillairflow.com

Virginia

□ 9415 Atlee Commerce
 Center Boulevard
 Suite I
Ashland, VA 23005
 804/550-7780
 Fax: 804/550-7787
richmond@mcgillairflow.com

Washington

□ 258 SW 43rd Street
 Building 3, Suite M-A
Renton, WA 98055
 425/251-9880
 Fax: 425/251-9891
seattle@mcgillairflow.com

Wisconsin

□ N56 W13555 Silver Spring Drive
Menomonee Falls, WI 53051
 262/252-3249
 Fax: 262/252-3254
milwaukee@mcgillairflow.com

AirFlow/Acoustical Laboratory

190 East Broadway
Westerville, OH 43081
 614/882-5455
 Fax: 614/882-2090
mafengineering@mcgillairflow.com

Corporate Headquarters

One Mission Park
Groveport, OH 43125
 614/836-9981
 Fax: 614/836-9843
marketing@mcgillairflow.com

Note:

McGill AirFlow Corporation
 also has sales representatives
 in other major cities.

KEY

- Manufacturing Plant Location
- Also a Duct Express Warehouse Location



An enterprise of United McGill Corporation — Founded in 1951
 Web site: www.mcgillairflow.com